



TECHNICAL SPECIFICATION

QuiPower Off-Grid


ENERGY TRANSFORMATION IS HERE. IT'S TIME TO TAKE CHARGE.

QuiPower Off-Grid for QuiPower Storage

QuiPower Off-Grid

Dimensions	Off-Grid M3/L3
Width (mm)	280
Height (mm)	300
Depth (mm)	121

General	Off-Grid M3	Off-Grid L3
Number of phases	3	3
AC Voltage range between L and N (V)	187 - 251	187 - 251
AC Voltage Range between L and L (V)	324 -436	324 -436
Rated frequency (Hz)	47,55 - 51,45	47,55 - 51,45
Max power (kVA)	9,8	13
Max current (A)	14	20
Heat dissipation	Natural cooling	Natural cooling
Weight (kg)	<5	<5
Installation mode	Wall mounted	Wall mounted
Operating Temperature Range (°C)	-25 to 60	-25 to 60
Humidity (%)	<95	<95
Altitude (m)	<2000	<2000
Communication	RS485	RS485
Self-consumption (no load) (W)	<15	<15

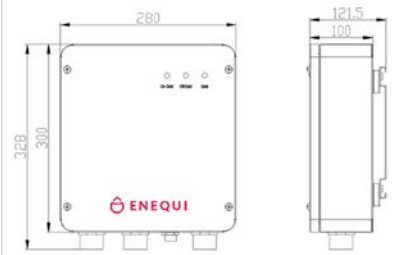

QuiPower Off-Grid

QuiPower Off-Grid

- Island Mode for energy storage
- Works together with solar panel installation



Kung Hans väg 3
192 68 Sollentuna
Sweden

+46(0)10 - 122 17 00
info@enequi.com
www.enequi.com